

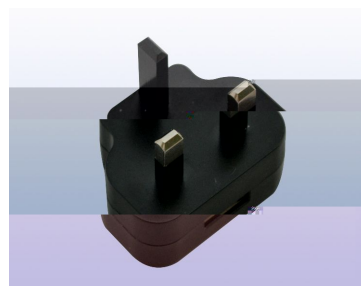
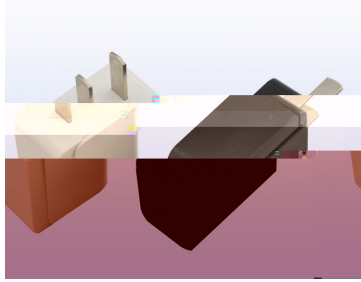


# AC/DC Adapter 5W Series Wall Mount EP19 Series

## (Product Display):

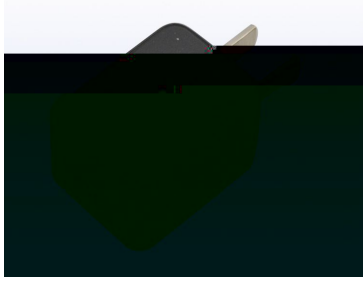

## (Mechanical Spec):

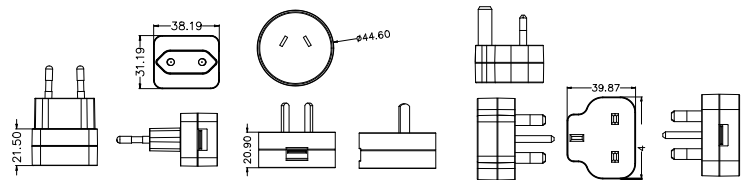

## (Product Highlights):

- (Low Energy Consumption)  
CEC Level 5, Energy Star 2.0
- / (Ultra Small Size/Light Weight)
- LED , / , , , USB  
Suit LED Lighting, Point Reading Machine/Pen, M.P., Display  
or Photo Frame, Network and USB Devices etc.

## (Electrical Spec):

- / / (Input Voltage/Current/Frequency):  
AC 100-240V (90-264V), 50/60Hz (47/63Hz), 0.15A Max.
- (Output Power): 5W
- (Output Voltage): 3-15V
- (Output Current): 0.1-1A
- (Load Regulation):  $\pm 5\%$
- (Hi-Pot Test): AC 3000V/1 Min/ 5mA
- (Insulation Resistance): DC 500V 100M
- (Efficiency): 68%MIN

## (Product Protection):

- (Short Circuit Protection)
- (Over Voltage Protection)
- (Over Current Protection)

## (Safety Approvals):

- CCC
- CE  GS  BS
- UL/CUL  FCC  BSMI  PSE
- KC/KCC

## (Reliability Test):

- (MTBF): 30000 hours @ 25
- DC (DC Jack Plug In/Out):  
3000 , (No bad contact)
- ; 1 , 30mm ,  
1 , ( ) , .  
Drop In: Single free drop from 1m to 30mm wood board,  
apply one times on each surface, components are not  
break off.
- (Burn-In Test): load, 2 hours
- / (Operating Temperature/Humidity):  
-5 to 40 , 5% to 90% RH
- / (Storage Temperature/Humidity):  
-20 to 70 , 5% to 95% RH

## (Packing Method):

- PE + (PE Bag+Carton)